



CITROËN XSARA 1998-


VEHICLE ON THE FLOOR

1. engine bonnet; remove upholstery
2. bulkhead; detach panel
3. longitudinal reinforcement in front wings; rear section; remove rubber sealing
4. longitudinal reinforcement in front wings; front section
5. front longitudinal members; front section
6. crossmember, upper; detach panel

7. front doors; drill and plug hole
8. front doors; rear section; drill and plug hole
9. front doors; front section; loudspeaker!; remove grill
10. 'A' posts; drill and plug hole
11. 'B' posts; remove grommet; pull out and lock safety belt
12. rear doors; drill and plug hole
13. rear doors; rear section; drill and plug hole
14. rear doors; front section; loudspeaker!; remove grill

15. tailgate; rear section; remove rubber sealing
16. tailgate; left; right; drill and plug hole
17. tailgate; front section; left; drill and plug hole
18. tailgate; front section; right; remove grommet
19. rear wings; rear section; remove upholstery
20. 'C' posts; remove upholstery; remove rubber sealing
21. crossmember, upper

UNDERSIDE

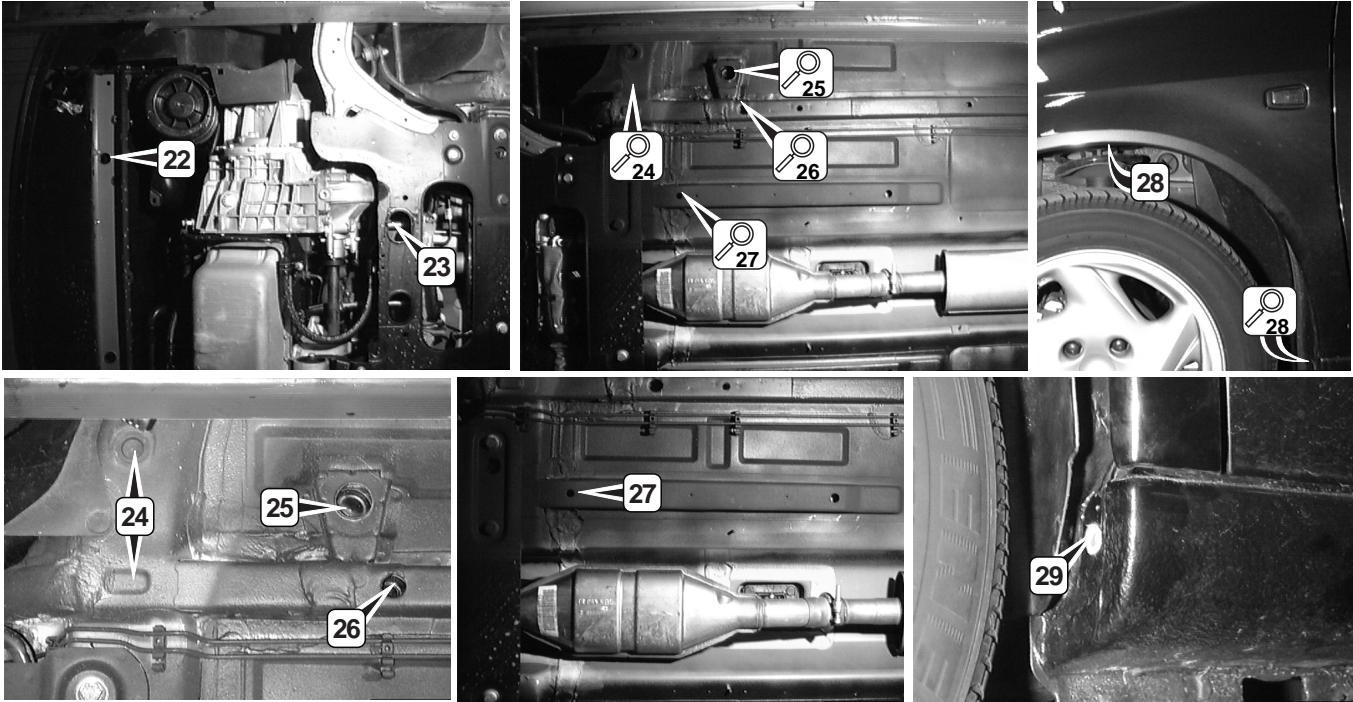

22. crossmember, lower

23. subframe

24. floor panel; reinforcements; front section; remove rubber sealing


25. floor panel; reinforcements

26. front longitudinal members

27. longitudinal reinforcements of tunnel

28. front wings; remove plastic insert

29. sills; front section; remove rubber sealing

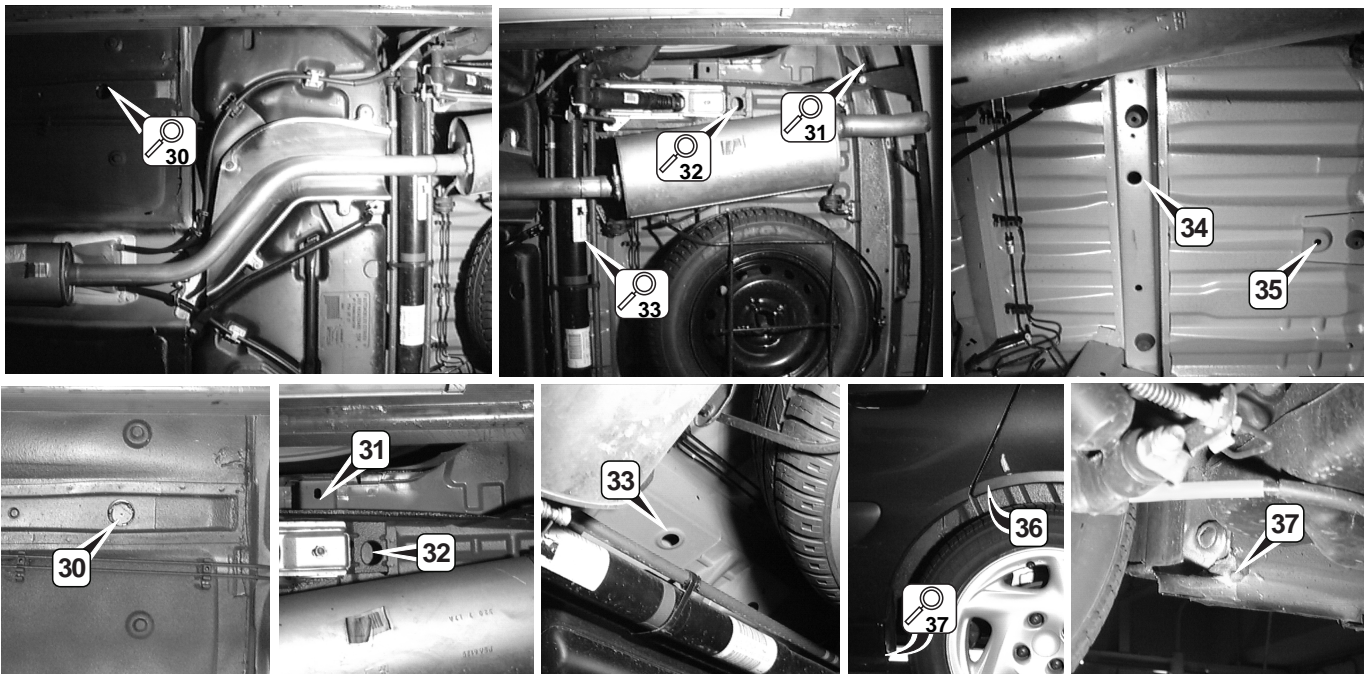

30. floor panel; reinforcements; rear section

31. transversal reinforcement; spare wheel mountings

32. longitudinal members; rear; rear section

33. crossmember rear of fuel tank

34. crossmember, lower

35. towing eye mounting

36. rear wings; remove plastic insert

37. sills; rear section; remove rubber sealing