
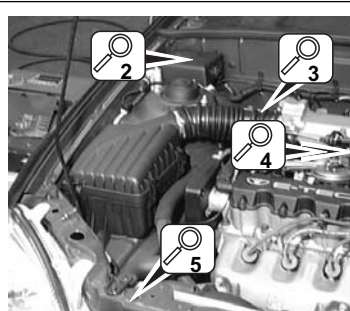
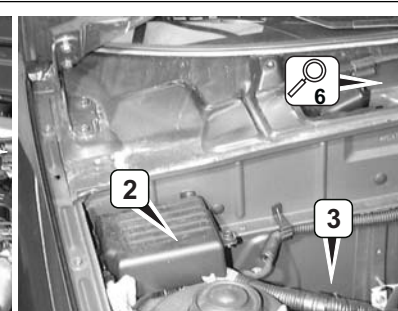

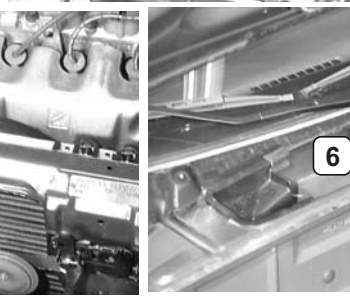
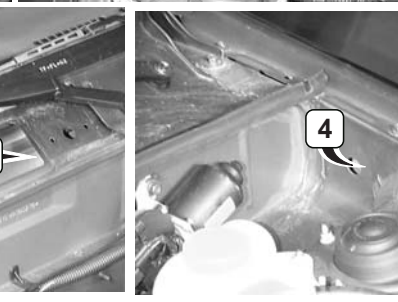



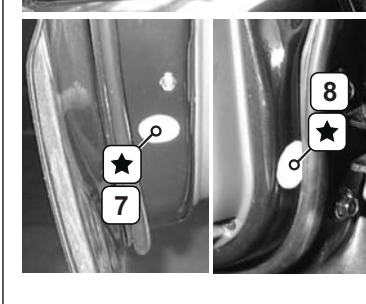












DAEWOO LANOS 1997-

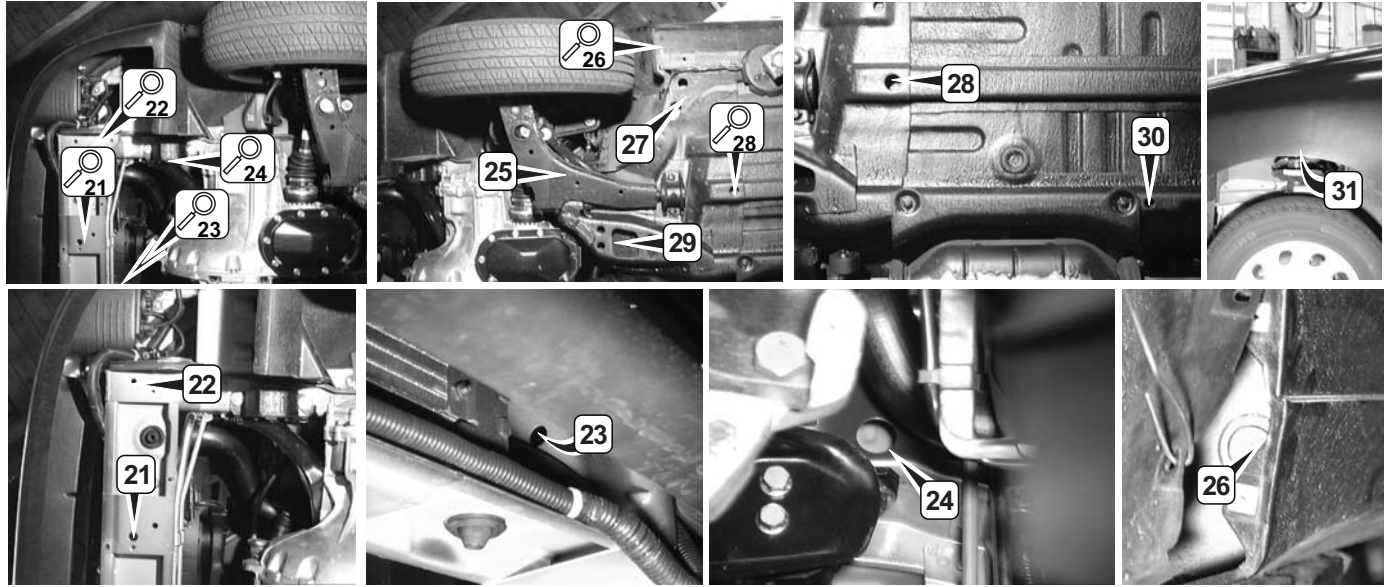
VEHICLE ON THE FLOOR

			<ol style="list-style-type: none"> 1. engine bonnet 2. front wings; rear section; right; remove fuse box 3. vertical reinforcements; dash panel 4. front wings; rear section; left 5. crossmember, upper; radiator! 6. bulkhead; detach panel; do not spray upwards!
			

			<ol style="list-style-type: none"> 7. front doors; rear section; drill and plug hole; loudspeaker! 8. front doors; front section; drill and plug hole; loudspeaker! 9. 'A' posts; drill and plug hole 10. 'B' posts; drill and plug hole; pull out and lock safety belt 11. rear doors; rear section; drill and plug hole 12. rear doors; front section; drill and plug hole
			

			<ol style="list-style-type: none"> 13. tailgate; rear section; detach panel 14. tailgate; front section; detach panel 15. top; reinforcements; detach panel 16. 'C' posts; drill and plug hole 17. rear wings; left; remove cover 18. 'C' posts; left 19. rear wings; right; remove cover 20. 'C' posts; right
			

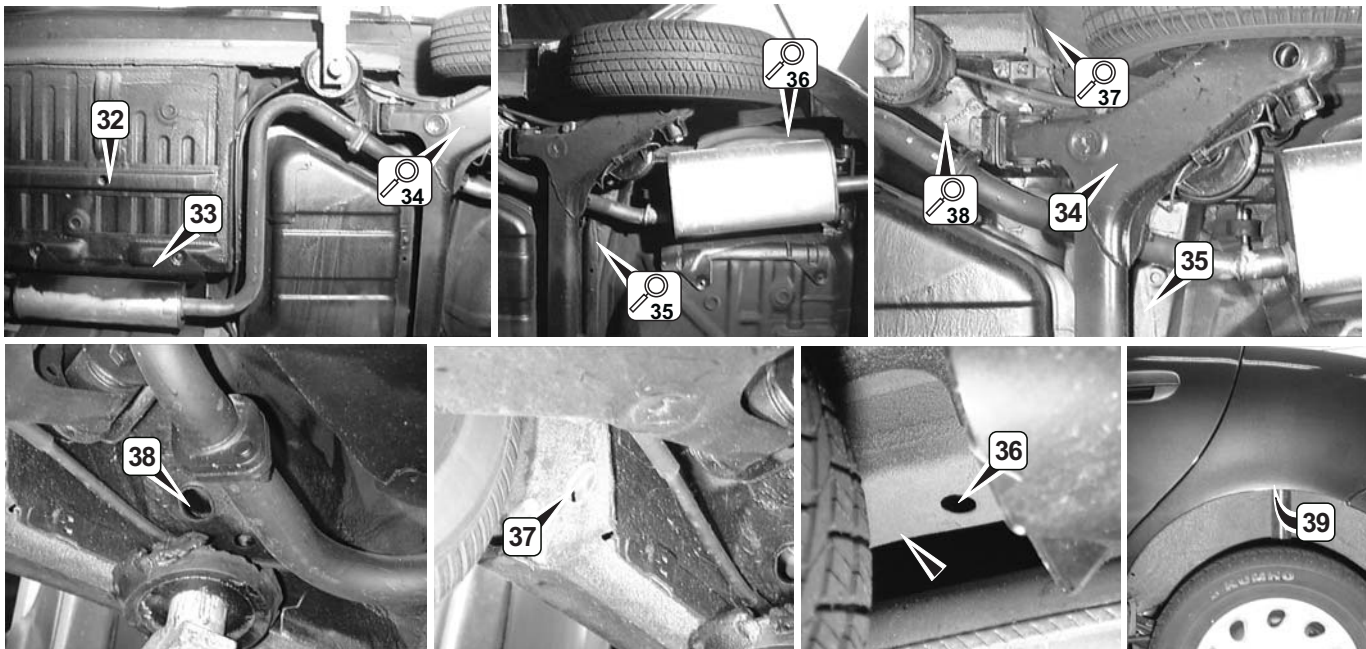
UNDERSIDE



21. crossmember, lower
 22. front longitudinal members; front section
 23. vertical reinforcements
 24. front longitudinal members; rear section

25. suspension arms
 26. sills; front section; remove plug
 27. reinforcements at front end of floor panel
 28. longitudinal member; floor panel; front section

29. longitudinal reinforcements of tunnel; front section
 30. longitudinal reinforcements of tunnel; rear section
 31. shock absorber top mountings; front



32. longitudinal member; floor panel; rear section
 33. rear longitudinal members; front section
 34. rear suspension

35. crossmember front of spare wheel well
 36. rear longitudinal members; rear section
 37. inner and outer sills; remove plug

38. longitudinal members; rear section; remove plug
 39. shock absorber top mountings; rear