



HYUNDAI LANTRA 1996-


VEHICLE ON THE FLOOR

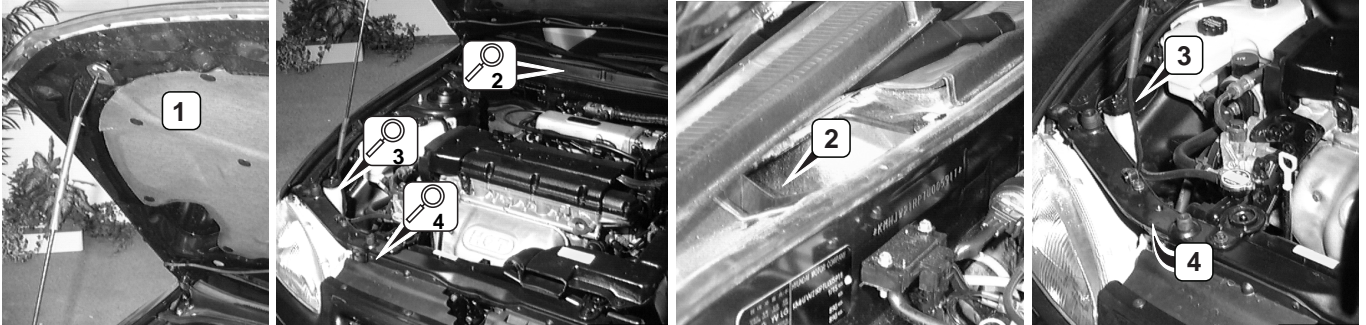

- 1. engine bonnet
- 2. bulkhead; detach panel
- 3. front wings; front section
- 4. crossmember, upper

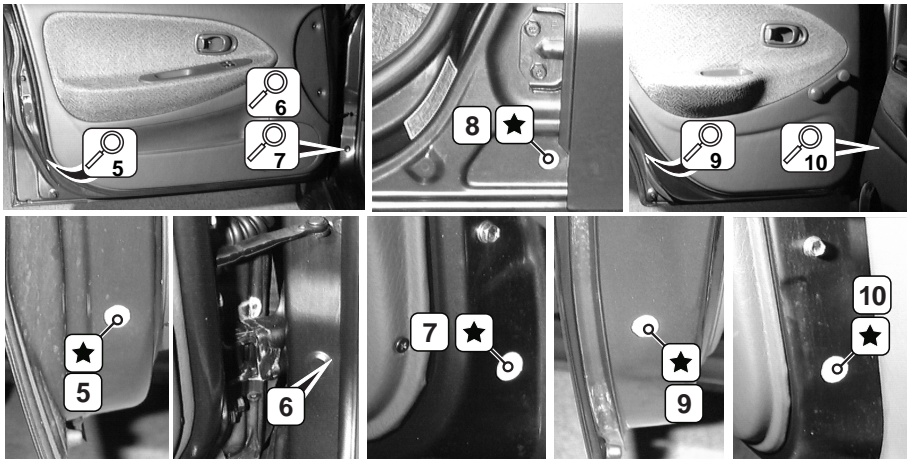


- 5. front doors; rear section; drill and plug hole
- 6. 'A' posts; remove plug
- 7. front doors; front section; drill and plug hole
- 8. 'B' posts; drill and plug hole; pull out and lock safety belt
- 9. rear doors; rear section; drill and plug hole
- 10. rear doors; front section; drill and plug hole

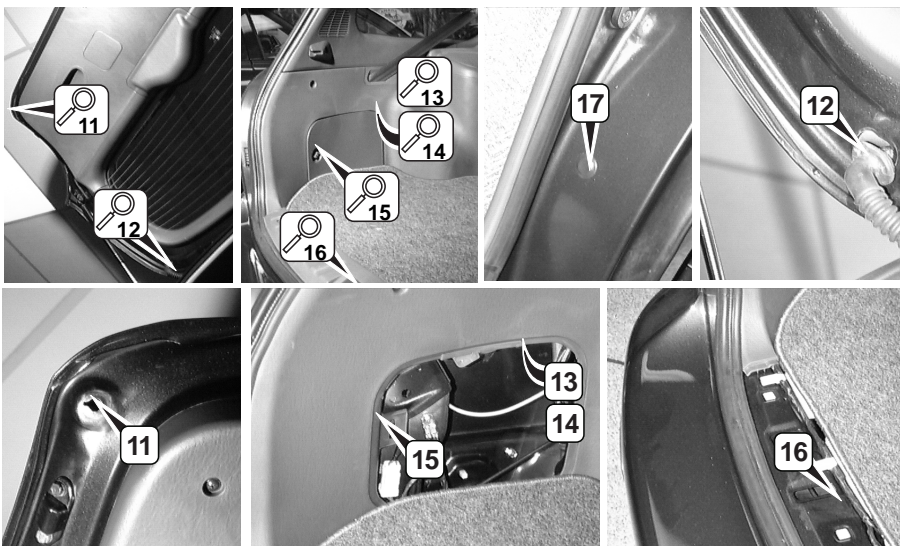

- 11. tailgate; rear section; remove rubber sealing
- 12. tailgate; front section; remove rubber sealing
- 13. rear wings; open lid
- 14. 'C' posts; spray upwards
- 15. 'D' posts; spray upwards
- 16. crossmember, upper
- 17. 'C' posts; remove plug

UNDERSIDE

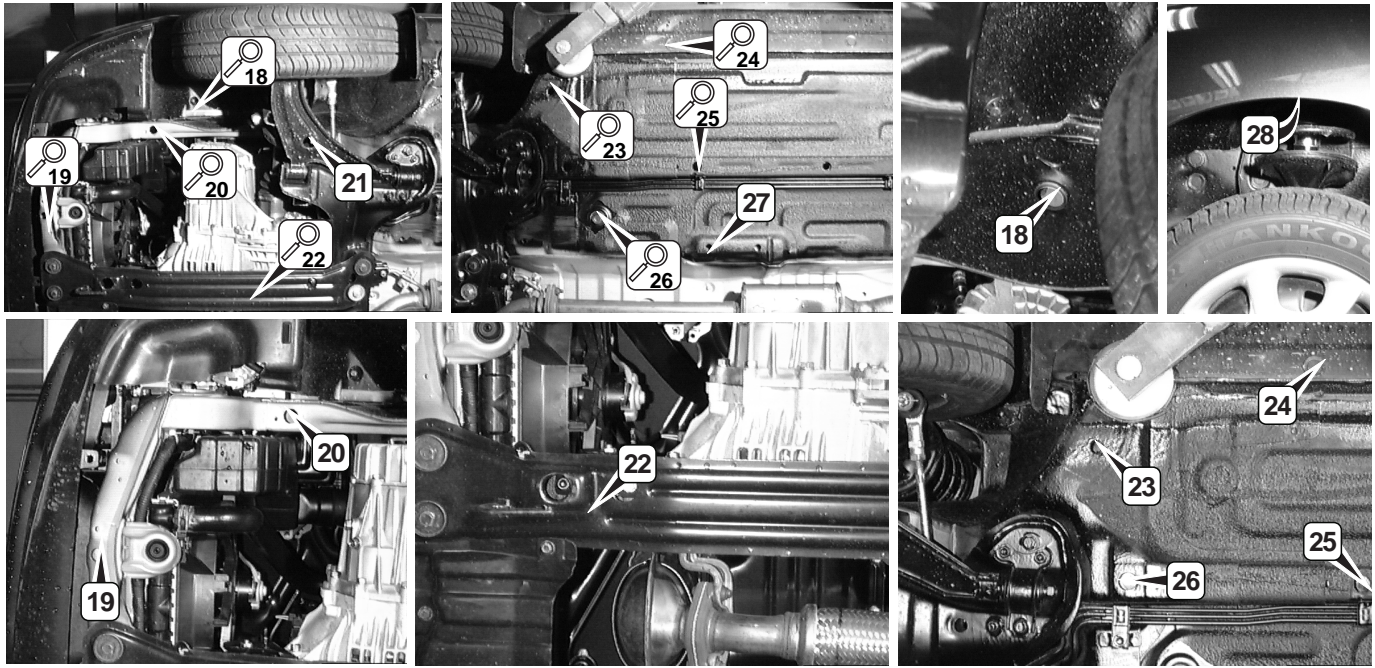

18. longitudinal members; front section; remove rubber sealing

19. crossmember, lower; detach panel

20. front longitudinal members; front section

21. front wheel suspension arms

22. subframe

23. floor panel; reinforcements; front section


24. sills; front section; remove rubber sealing

25. front longitudinal members; rear section

26. floor panel; reinforcements

27. tunnel reinforcement

28. shock absorber top mountings

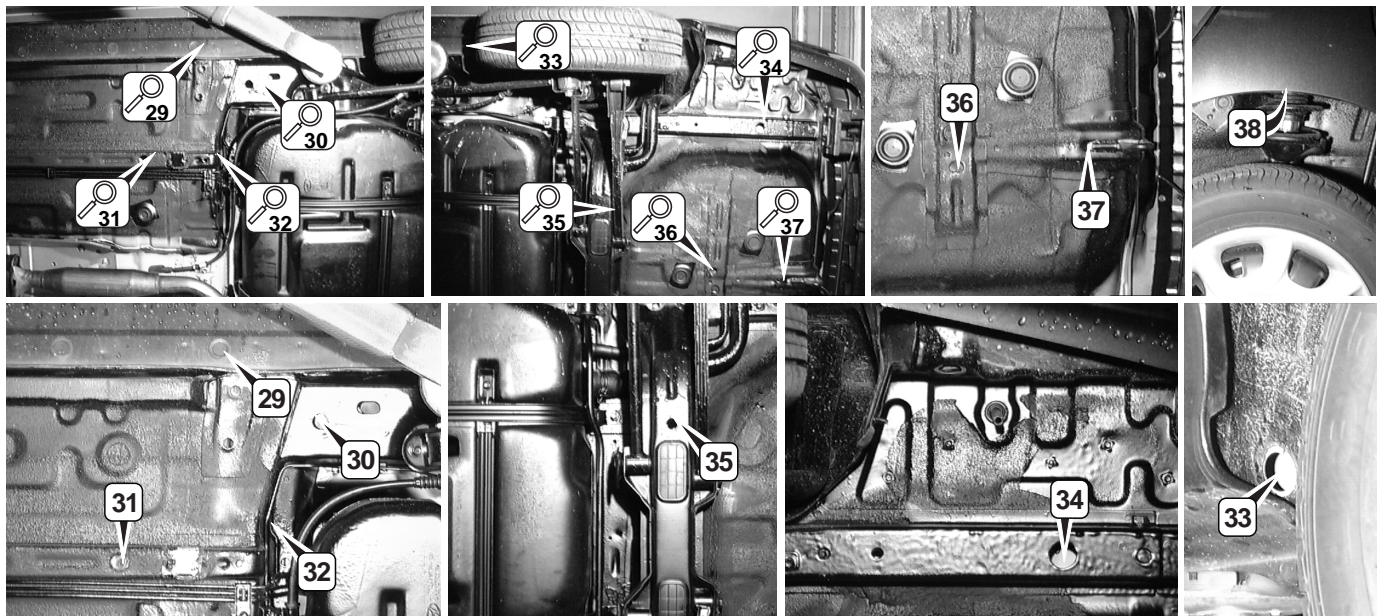

29. sills; rear; remove rubber sealing

30. longitudinal members; rear; front section

31. floor panel; reinforcements; rear section

32. crossmember front of fuel tank

33. sills; rear section; remove rubber sealing

34. longitudinal members; rear; rear section

35. crossmember rear of fuel tank

36. reinforcements; remove rubber sealing

37. towing eye mounting

38. shock absorber top mountings